

KITO

Electric Chain Hoist Model ER2



The New One

Durable, safe,
easy to use

Made in Japan!

- > **Frequency inverter technology**
Exact positioning of the load
- > **New electromagnetic brake**
Improved performance and safety
- > **Newly developed load sheave**
Smooth and low-noise operation
- > **High FEM classification**
M6/3m for capacities up to 500 kg and 2 speeds (dual speed)
- > **Upgraded annealing process of load chain**
Ensures ultimate resistance and durability

**10 Year
warranty on
brake**

Product Warranty: 3 years product warranty and 10 years warranty on the brake system.


The guarantee is only valid if the operating conditions, inspection and maintenance intervals as described in the owner's manual are followed

Source: Indukran

www.kito.net

KITO HOISTS

Always on the safe side

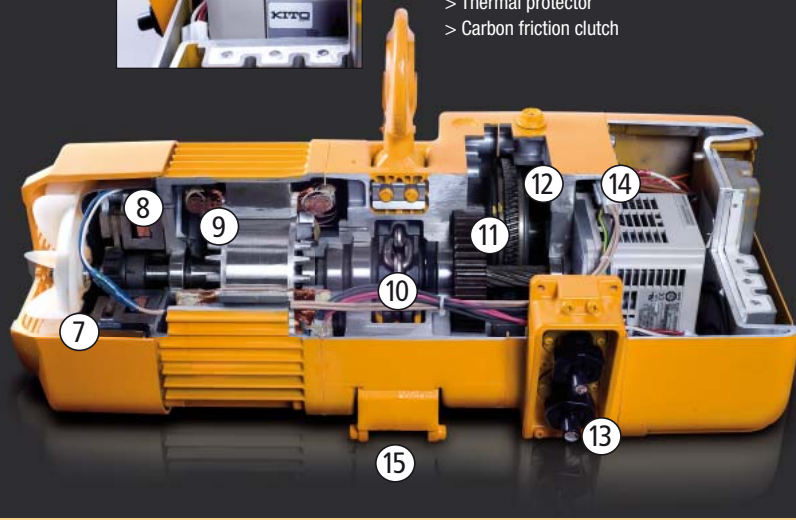

Standards:

- > 400V / 50Hz
- > Frequency inverter for 2 lifting speeds
- > Contactor control for single speed
- > CH-Meter: operating hours / number of starts
- > Ergonomic push button control
- > Electromagnetic brake
- > Upper-lower limit switch
- > Canvas chain container
- > Nickel-plated load chain DAT (G 80) Standard EN 818-7
- > Thermal protector
- > Carbon friction clutch

Options:

- > 500 V / Contactor control
- > 230 V / 50 Hz / 60 Hz, 3 phase

- > Rubber bumpers for motorized trolleys
- > Additional mechanical brake
- > Electrical overload limiter

- > Acoustic overload signal
- > Radio remote control
- > Variable speed control

- > Level limit switch
- > Steel chain container
- > Trolley versions: motorized, geared and plain

1. Top hook suspension:

Hook or overhead mounting suspension can be attached or dismantled with very little effort (except for F-body)

2. Aluminium die-cast body:

Very robust design, extreme durable body

3. Chain container:

Canvas chain container

4. Load chain:

Nickel-plated load chain, grade DAT (G 80) Standard EN 818-7

5. Push button control:

ergonomic design, improved durability

6. Bottom Hook:

360° pivotable, eliminates twisting of the load chain

7. External motor fan:

Aluminium die-cast motor frame with external motor fan reduces a rise in heating during frequent operation

8. Electromagnetic brake:

Produces a strong braking power (force) and secures the load

9. Thermal motor protector:

A sensor cuts the power in the case of overheating

10. Chain guide:

Uniquely developed design, ensures very smooth chain-feeding

11. Gearbox:

Helical gears offer a smooth and quiet operation

12. Friction clutch:

Recently developed by KITO as an overload protection which interrupts the transmission power from the motor

13. Direct wiring:

Easy to connect and disconnect using special internal connectors

14. CH (counter hour) meter and lifting cycle counter are integrated in the frequency inverter:

Allows an efficient control of maintenance intervals

15. Upper-lower limit switch:

Turns the motor off when the highest or lowest points have been reached.

Technische Angaben

Capacity (t)	Product Code	Body Size	Lifting motor		Lifting speed (m/min.)			Load chain		Classification ISO/FEM	Testload (kg)	Net weight (kg)	Additional Weight per 1 m lift	
			Output (kW)	Rating (%ED)	50Hz		Diameter	x	Chain falls					
					Fast	Slow								
125 kg	ER2-001IH	B	0,56		Preset	16,6	2,8	4,3	x	1	M6/3m	156 kg	27	0,42
250 kg	ER2-003IS				Adjustable		1,4					Preset		
	ER2-003IH	Adjustable	0,9		Preset	15,7	2,6	36						
500 kg	ER2-005IL	C	0,56		Adjustable		1,3		6,0	x		1	625 kg	36
	ER2-005IS				Preset	0,8	0,4							
1,0	ER2-010IL	D	0,9		40/20	Adjustable		4,5	0,7	7,7		x	1	M5/2m
	ER2-010IS			Preset		8,2	1,4	1,25	52					
1,6	ER2-016IS		1,8	Preset		5,3	0,9					2	72	
	ER2-020IL			Adjustable			0,4	10,2	x					
2,0	ER2-020IS			Preset		4,3	0,7							
	ER2-020IS			Adjustable			0,4	8,2	1,4					
				Adjustable		0,7								

* Note: The high speed is preset to the maximum speed in KITO factory. The speed is adjustable between high and low. Higher capacities on request.

Disclaimer:

KITO does not assume liability for inappropriate usage of products.
Operating instructions must be followed at all times.
Subject to technical change, misprint and errors.

NOTES

[illegible]



www.niko.eu.com

AUSTRIA-NIKO Vertriebs GmbH

Hainfelder Straße 48
A - 2560 Berndorf
Tel. 0043 2672-21201
Fax 0043 2672-21201-13
office.at@niko.eu.com
www.niko.world

CHINA-NIKO TRADING (SHANGHAI) Co., Ltd.

Room 901-156, No.18 TianShan Road,
ChangNing District, Shanghai,
P.R.China
Tel. 0086 158 0064 7160
info.cn@niko.eu.com

GERMANY-NIKO Technik GmbH

Robert-Bosch-Str. 14
DE - 42489 Wülfrath
Tel. 0049 (0) 2058 9093603
Fax 0049 (0) 2058 9093604
office.de@niko.eu.com

GREECE-Helm Hellas S.A.

82nd Km Athens-Korinthos
P.O. Box 209
GR - 201 00 KORINTHOS
Tel. 0030 27410 76800
Fax 0030 27410 25368
info@niko.eu.com

POLAND- NIKO Polska

Wojska Polskiego 65A
PL - Wielun 98-300
Tel. 0048 504 00 35 56
info.pl@niko.eu.com

UNITED KINGDOM-NIKO Ltd.

Units 15-21, Insight Park
Welsh Road East, Southam
Warwickshire, CV47 1NE -UK
Tel. 0044 (0) 1926 813111
Fax 0044 (0) 1926 815599
Sales@niko.co.uk
www.niko.co.uk

USA-NikoTrack LLC

210 Century Drive
Bristol, CT 06010
Tel. 001 860-845-8179
Fax 001 860-584-8612
info@nikotrack.com
www.nikotrack.com



We take no obligation for layout, composition, technical modifications or misprints.
Subject to technical modifications / Images may differ from actual products.