

Trolleys

The Mobile One

Universal trolleys

Standard: rubber bumper, lugs


KITO HOISTS- Always on the safe side

www.kito.net



Plain trolley TSP

125 kg - 3 t

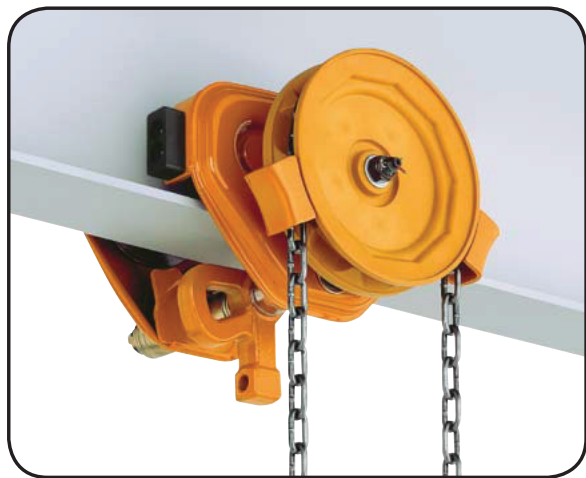

Geared trolley TSG

125 kg - 3 t



Motorized trolley MR2

125 kg - 20 t

TSG geared trolley

- ▶ Up to 30,000 kg load capacity
- ▶ Lightweight and compact design
- ▶ Fall protection device and rubber bumpers
- ▶ Extensive range of flange widths
- ▶ Heat-treated wheels
- ▶ Connector C for rigid suspension and / or hook suspension up to 5,000 kg

Options

- ▶ Connector E for ER2 electric chain hoist
- ▶ W30 flange width extender

Technical data

Type	Load capacity	Shaft	Flange width	Connector	Hand chain	Ø Hand chain	Curve radius min.	Weight
	kg		mm		m	mm	mm	kg
TSG	125	Standard	58 - 163	C	3.0	5.0 x 25.0	1,350 - 1,400	13.5
TSG	125	W30	164 - 305	C	3.0	5.0 x 25.0	1,350 - 1,400	13.5
TSG	250	Standard	58 - 163	C	3.0	5.0 x 25.0	1,350 - 1,400	13.5
TSG	250	W30	164 - 305	C	3.0	5.0 x 25.0	1,350 - 1,400	13.5
TSG	500	Standard	58 - 163	C	3.0	5.0 x 25.0	1,350 - 1,400	13.5
TSG	500	W30	164 - 305	C	3.0	5.0 x 25.0	1,350 - 1,400	13.5
TSG	1,000	Standard	58 - 163	C	3.0	5.0 x 25.0	1,350 - 1,400	13.5
TSG	1,000	W30	164 - 305	C	3.0	5.0 x 25.0	1,350 - 1,400	13.5
TSG	1,500	Standard	82 - 204	C	3.0	5.0 x 25.0	1,600	20.0
TSG	1,500	W30	205 - 305	C	3.0	5.0 x 25.0	1,600	20.0
TSG	2,000	Standard	82 - 204	C	3.0	5.0 x 25.0	1,600	21.0
TSG	2,000	W30	205 - 305	C	3.0	5.0 x 25.0	1,600	21.0



TSG for ER2 electric chain hoist with connector E



**TSG geared trolley
125 kg to 3,000 kg**



**TSG geared trolley
5,000 kg to 30,000 kg**



**TSG
with connector C
for hand chain block**

KITO



**TSP
with connector C
for hand chain block**



**TSP plain trolley
125 kg to 2,000 kg**

TSP plain trolley

- ▶ Up to 5,000 kg load capacity
- ▶ Lightweight and compact design
- ▶ Fall protection device and rubber bumpers
- ▶ Extensive range of flange widths
- ▶ Heat-treated wheels
- ▶ Sealed, maintenance-free bearings
- ▶ Connector C for rigid suspension and / or hook suspension

Options

- ▶ Connector E for ER2 electric chain hoist
- ▶ W30 flange width extender

TSP
for ER2 electric chain hoist
with connector E



Technical data

Type	Load capacity	Shaft	Flange width	Connector	Curve radius min.	Weight
	kg		mm		mm	kg
TSP	125	Standard	50 - 163	C	1,150 - 1,200	5.1
TSP	125	W30	164 - 305	C	1,150 - 1,200	5.1
TSP	250	Standard	50 - 163	C	1,150 - 1,200	5.1
TSP	250	W30	164 - 305	C	1,150 - 1,200	5.1
TSP	500	Standard	50 - 163	C	1,150 - 1,200	5.1
TSP	500	W30	164 - 305	C	1,150 - 1,200	5.1
TSP	1,000	Standard	58 - 163	C	1,350 - 1,400	8.0
TSP	1,000	W30	164 - 305	C	1,350 - 1,400	8.0
TSP	1,500	Standard	82 - 204	C	1,600	14.0
TSP	1,500	W30	205 - 305	C	1,600	14.0
TSP	2,000	Standard	82 - 204	C	1,600	14.0
TSP	2,000	W30	205 - 305	C	1,600	14.0

MR2 motor trolley

- ▶ Up to 5,000 kg load capacity
- ▶ 380 - 440 V / 50 Hz
- ▶ Single and dual traveling speed
- ▶ Adjustable start-up and braking ramps (frequency inverter)
- ▶ Connector for rigid suspension (ER2 electric chain hoist)
- ▶ Heat-treated wheels

Options

- ▶ Fall protection device and bumpers as a set

MR2
with ER2




MR2

Adjustable start-up
and braking ramps
(frequency inverter)

Adjustable
traversing speeds
(frequency inverter)



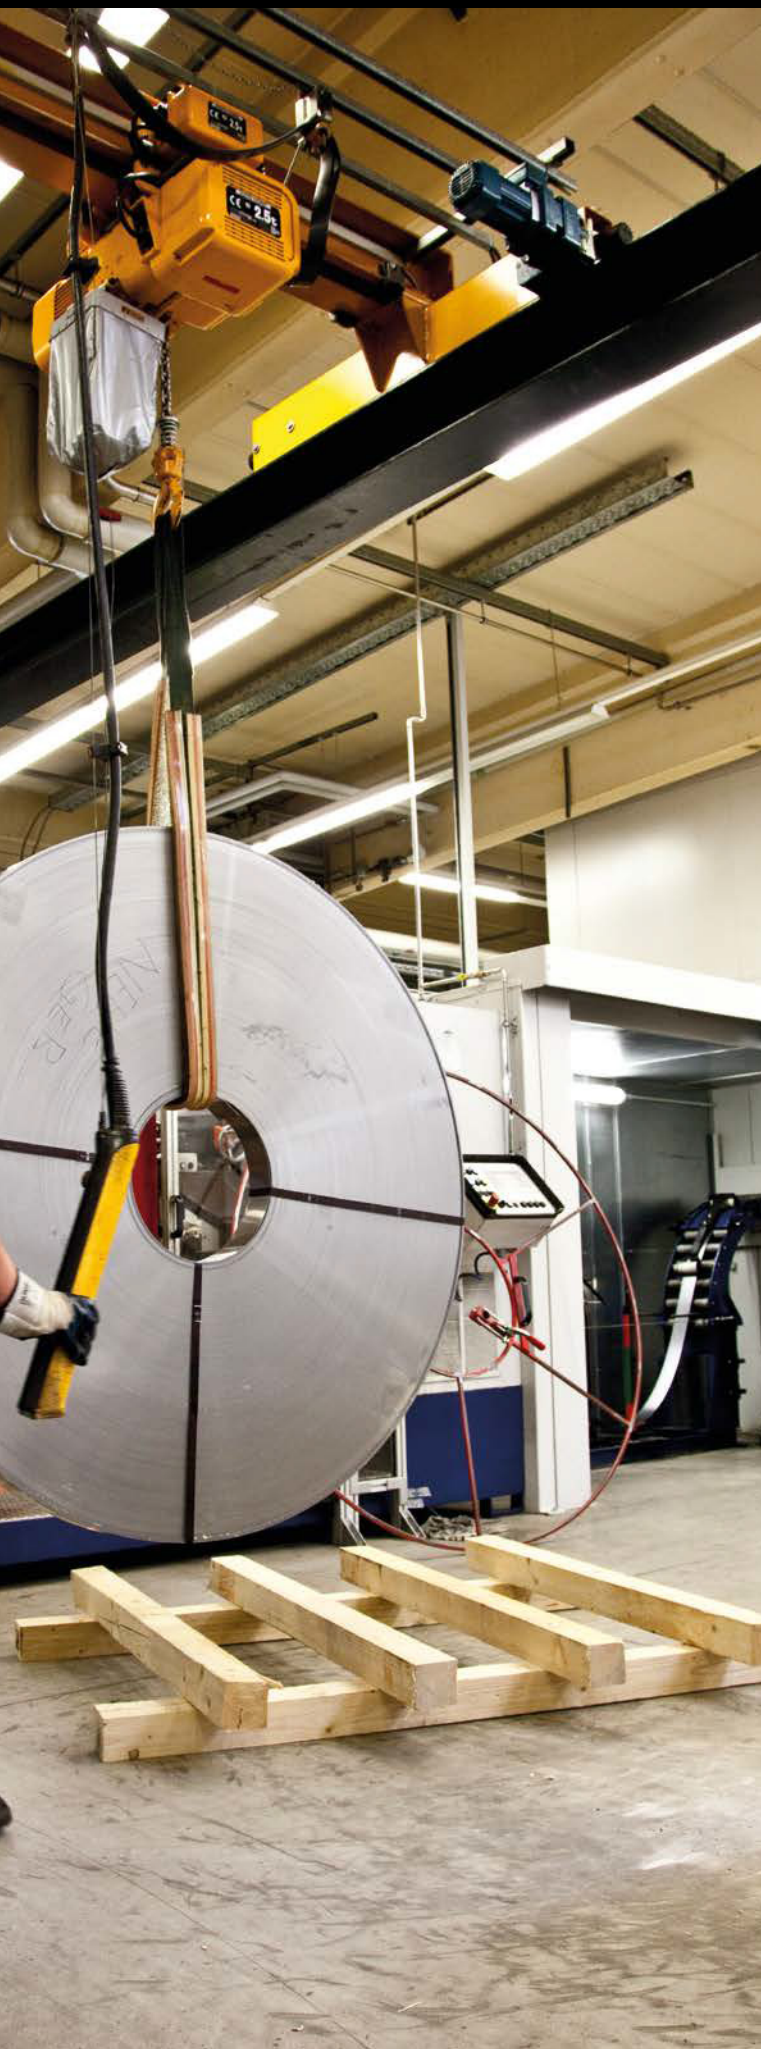

MR2
with ER2

Technical data

Type	Load capacity	Version	Speed	Flange width	Travel speed	ED	Curve radius min.
	kg			mm	m/min	%	mm
MR2	125	S	single	58 - 163	20.0	40	800
MR2	125	IS	dual	58 - 163	24.0/4.0-2.4	27 / 13	800
MR2	250	S	single	58 - 163	20.0	40	800
MR2	250	IS	dual	58 - 163	24.0/4.0-2.4	27 / 13	800
MR2	500	S	single	58 - 163	20.0	40	800
MR2	500	IS	dual	58 - 163	24.0/4.0-2.4	27 / 13	800
MR2	1,000	S	single	58 - 163	20.0	40	800
MR2	1,000	IS	dual	58 - 163	24.0/4.0-2.4	27 / 13	800
MR2	1,600	S	single	82 - 204	20.0	40	800
MR2	1,600	IS	dual	82 - 204	24.0/4.0-2.4	27 / 13	800
MR2	2,000	S	single	82 - 204	20.0	40	800
MR2	2,000	IS	dual	82 - 204	24.0/4.0-2.4	27 / 13	800



www.niko.eu.com

AUSTRIA-NIKO Vertriebs GmbH

Hainfelder Straße 48
A - 2560 Berndorf
Tel. 0043 2672-21201
Fax 0043 2672-21201-13
office.at@niko.eu.com
www.niko.world

CHINA-NIKO TRADING (SHANGHAI) Co., Ltd.

Room 901-156, No.18 TianShan Road,
ChangNing District, Shanghai,
P.R.China
Tel. 0086 158 0064 7160
info.cn@niko.eu.com

GERMANY-NIKO Technik GmbH

Robert-Bosch-Str. 14
DE - 42489 Wülfrath
Tel. 0049 (0) 2058 9093603
Fax 0049 (0) 2058 9093604
office.de@niko.eu.com

GREECE-Helm Hellas S.A.

82nd Km Athens-Korinthos
P.O. Box 209
GR - 201 00 KORINTHOS
Tel. 0030 27410 76800
Fax 0030 27410 25368
info@niko.eu.com

POLAND- NIKO Polska

Wojska Polskiego 65A
PL - Wielun 98-300
Tel. 0048 504 00 35 56
info.pl@niko.eu.com

UNITED KINGDOM-NIKO Ltd.

Units 15-21, Insight Park
Welsh Road East, Southam
Warwickshire, CV47 1NE -UK
Tel. 0044 (0) 1926 813111
Fax 0044 (0) 1926 815599
Sales@niko.co.uk
www.niko.co.uk

USA-NikoTrack LLC

210 Century Drive
Bristol, CT 06010
Tel. 001 860-845-8179
Fax 001 860-584-8612
info@nikotrack.com
www.nikotrack.com



We take no obligation for layout, composition, technical modifications or misprints.
Subject to technical modifications / Images may differ from actual products.