



Yale VS III

CACO
COLUMBUS McKINNON

- Manual Chain hoists
- Capacities: 500-2000kg



NIKO ... Quality in Motion

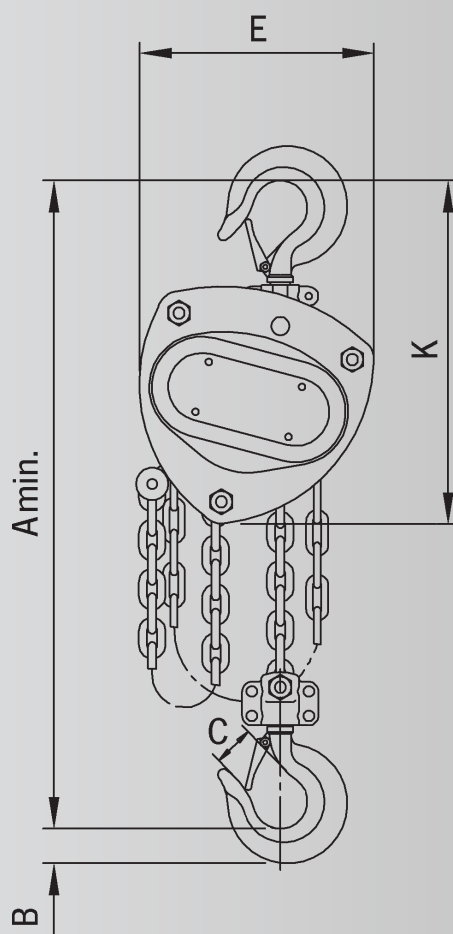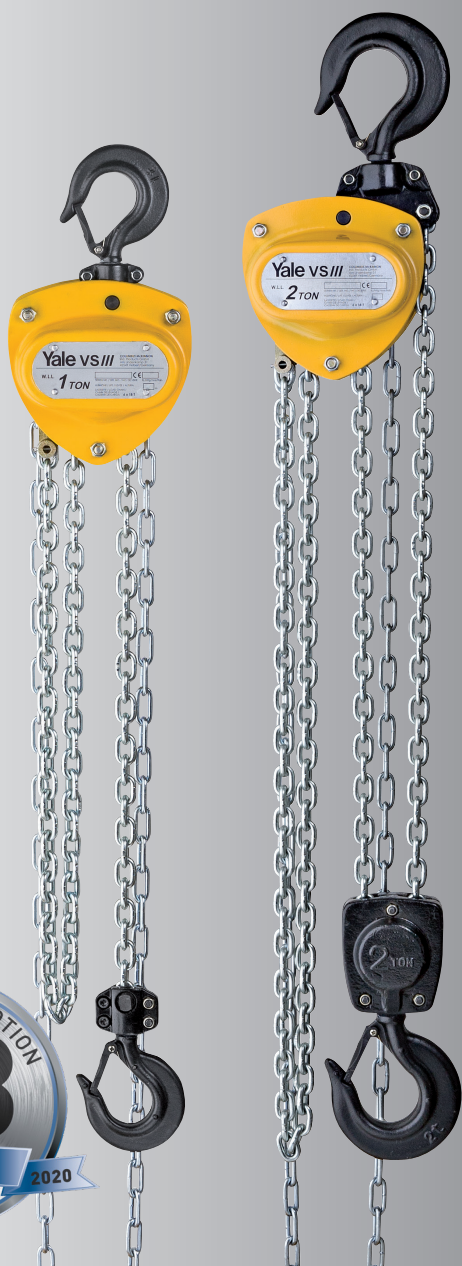

www.niko.eu.com

Yale VS III

The Yale hand chain hoist model VSIII combines all the features, expected by the user:

- Quality, Safety and Performance - at a favourable price.

Extremely low overall height allows optimal use of available headroom. Fully enclosed stamped steel housing allows also outdoor use. The hooks are equipped with robust safety latches and can rotate 360°.

Having long years of experience with this solid product, we decided to extend the VSIII series by the load capacities 10t, 20t, 30t and 50t. Hereby we attach great importance to quality and safety, in combination with a balanced price/performance ratio.

FINISH DETAILS

- Strong bolts between side plates and housing cover and the reinforced hand wheel cover ensure increased stability.
- Precision machined guide rollers ensure smooth running of the load chain.
- High quality bearings for gearbox, side plates and load chain sheave permit a long service life.
- Zinc-plated and yellow-chromated brake parts and guide rollers ensure increased corrosion protection.
- Zinc-plated load chain as standard for added corrosion protection.

OPTIONAL

- Overload protection device (from 500 kg available)
- Chain container




Technical data model VSIII

Model	EAN-No. 4025092*	Capacity in kg/ number of chain falls	Chain dimensions d x p mm	Lift per 1 m hand chain overhaul mm	Handle pull at WLL daN	Weight at standard lift (3 m) kg
VSIII 0,25/1	*665322	250/1	4 x 12	50	20	3.9
VSIII 0,5/1	*949545	500/1	5 x 15	26	21	9.0
VSIII 1,0/1	*949927	1000/1	6 x 18	24	24	11.5
VSIII 1,5/1	*593854	1500/1	8 x 24	17	30	17.5
VSIII 2,0/1	*949934	2000/1	8 x 24	19	32	19.0
VSIII 2,0/2	*949941	2000/2	6 x 18	15	29	17.3

Dimensions model VSIII

Model	VSIII 0,25/1	VSIII 0,5/1	VSIII 1,0/1	VSIII 1,5/1	VSIII 2,0/1	VSIII 2,0/2
A min., mm	290	350	380	450	460	490
B, mm	12	21	27	33	37	37
C, mm	26	28	32	37	41	41
D, mm	11	16	19	22	27	27
E, mm	118	145	158	180	205	170
F, mm	113	140	155	175	180	155
G, mm	65	80	87	85	94	87
H, mm	48	60	68	90	86	68
K, mm	190	240	270	300	320	285

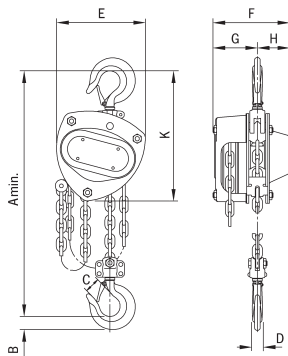


Model VSIII, 250 - 3000 kg, single fall



Load chain sheave with
needle bearing



Side plate with ball bearing

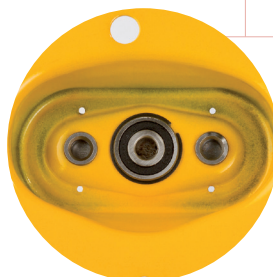

Housing cover with ball
bearing



Option: Chain container



www.niko.eu.com

AUSTRIA-NIKO Vertriebs GmbH

Hainfelder Straße 48
A - 2560 Berndorf
Tel. 0043 2672-21201
Fax 0043 2672-21201-13
office.at@niko.eu.com
www.niko.world

CHINA-NIKO TRADING (SHANGHAI) Co., Ltd.

Room 901-156, No.18 TianShan Road,
ChangNing District, Shanghai,
P.R.China
Tel. 0086 158 0064 7160
info.cn@niko.eu.com

GERMANY-NIKO Technik GmbH

Robert-Bosch-Str. 14
DE - 42489 Wülfrath
Tel. 0049 (0) 2058 9093603
Fax 0049 (0) 2058 9093604
office.de@niko.eu.com

GREECE-Helm Hellas S.A.

82nd Km Athens-Korinthos
P.O. Box 209
GR - 201 00 KORINTHOS
Tel. 0030 27410 76800
Fax 0030 27410 25368
info@niko.eu.com

POLAND- NIKO Polska

Wojska Polskiego 65A
PL - Wielun 98-300
Tel. 0048 504 00 35 56
info.pl@niko.eu.com

UNITED KINGDOM-NIKO Ltd.

Units 15-21, Insight Park
Welsh Road East, Southam
Warwickshire, CV47 1NE -UK
Tel. 0044 (0) 1926 813111
Fax 0044 (0) 1926 815599
Sales@niko.co.uk
www.niko.co.uk

USA-NikoTrack LLC

210 Century Drive
Bristol, CT 06010
Tel. 001 860-845-8179
Fax 001 860-584-8612
info@nikotrack.com
www.nikotrack.com



We take no obligation for layout, composition, technical modifications or misprints.
Subject to technical modifications / Images may differ from actual products.

© NIKO (Version February 2021)